

VHP SERIES ACHIEVER GAS HOT PLATE



VHP36U Step-up Burner Model with Optional Stand



CSA design certified. NSF listed.

BASIC MODELS:

VHP212 12" wide VHP424 24" wide
VHP636 36" wide VHP848 48" wide

KEY FEATURES:

- Stainless steel sides and control panel
- Full width pull out crumb tray
- Heavy duty cast iron top grates
- 30,000 BTU/hr open burners with lift-off heads
- Standing pilot ignition system
- One infinite heat control valve for each burner
- 4" adjustable legs
- 3/4" rear gas connection and gas pressure regulator
- One year limited parts and labor warranty

OPTIONAL FEATURES:

- Step-up burners. Rear burners elevated 4".
- Half hot-top on rear burner, 15,000 BTU/hr input.
- 5-5/8", 8", 10" and 11" legs
- Stainless steel stand with undershelf and casters

EXTERIOR DIMENSIONS:

_____ " W x 33" D x 12-3/8" working height on 6" adjustable legs

CLEARANCES:

	Combustible	Non-Combustible
Rear	6"	0"
Sides	6"	0"

Approved by _____

Date: _____

**SPECIFY TYPE OF GAS WHEN ORDERING.
SPECIFY ALTITUDE WHEN ABOVE 2,000 FT.**



VHP SERIES

ACHIEVER GAS HOT PLATE

INSTALLATION REQUIREMENTS:


1. A gas pressure regulator sized for this unit is included. Natural Gas 5.0" W.C. Propane Gas 10.0" W.C.
2. An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02169, www.NFPA.org. When writing refer to NFPA No. 96.
3. These units are manufactured for installation in accordance with National Fuel Gas Code, ANSI-Z223.1/NFPA #54 (latest edition). Copies may be obtained from The American Gas

Association Accredited Standards Committee Z223, @ 400 N. Capital St. NW, Washington, DC 20001, or the Secretary Standards Council, NFPA, 1 Batterymarch Park Quincy, MA 02169-7471.

NOTE: In the Commonwealth of Massachusetts

All gas appliances vented through a ventilation hood or exhaust system equipped with a damper or with a power means of exhaust shall comply with 248 CMR.

4. This appliance must be installed with a 6" clearance at both sides and the rear adjacent to combustible construction.

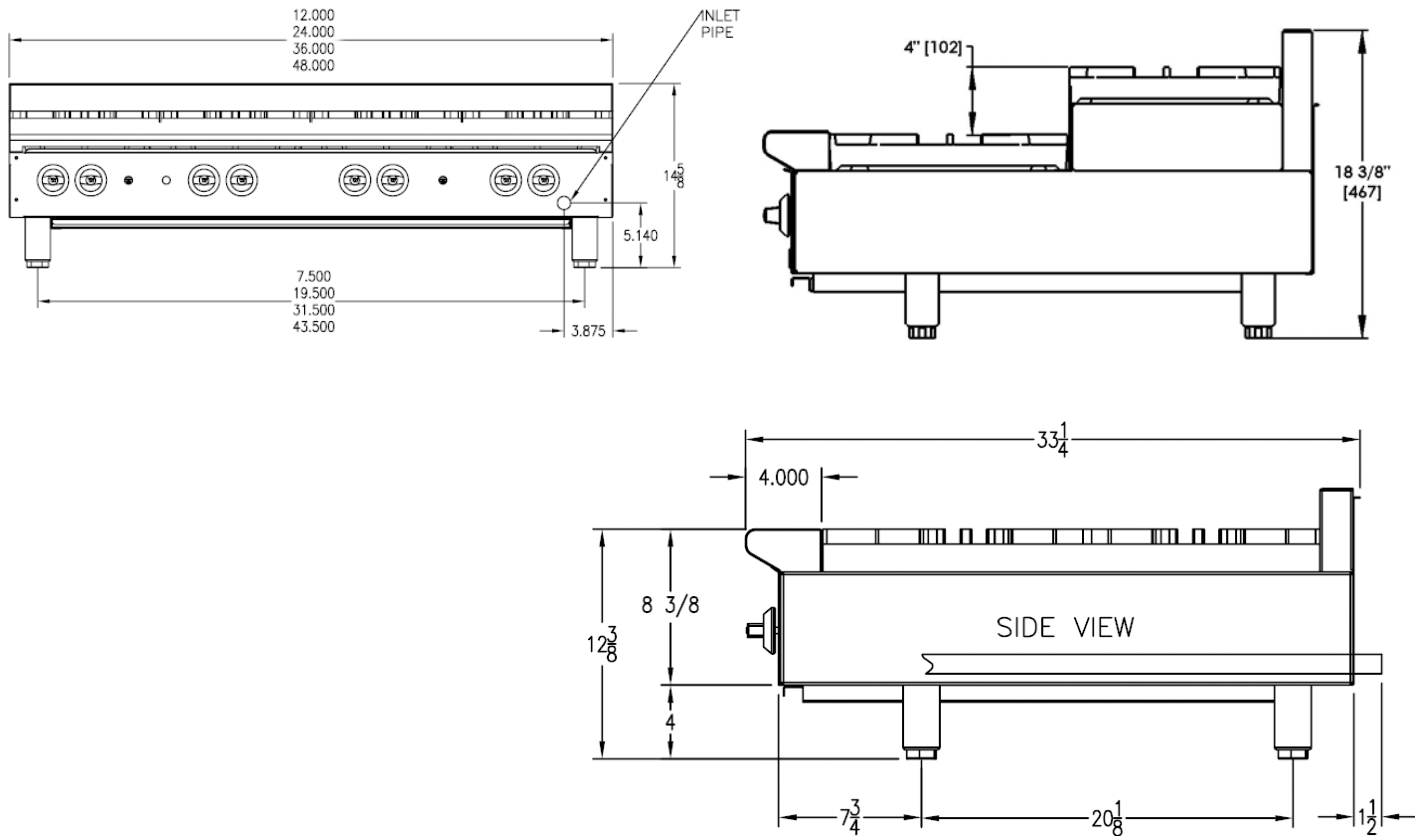

MODEL	WIDTH	DEPTH	OVERALL HEIGHT	WORKING HEIGHT	NO. OF BURNERS	TOTAL BTU/HR.	APPROX. SHIP WT. (LB/KG)
VHP212	12"	33"	14-5/8"	12-3/8"	2	60,000	95 lbs./43 kg
VHP424	24"				4	120,000	165 lbs./74 kg
VHP636	36"				6	180,000	265 lbs./119 kg
VHP848	48"				8	240,000	310 lbs./140 kg

NOTE: In line with its policy to continually improve its products, Vulcan-Hart Company reserves the right to change materials and specifications without notice.